


Place short pin in slot
when hinge is tensioned.

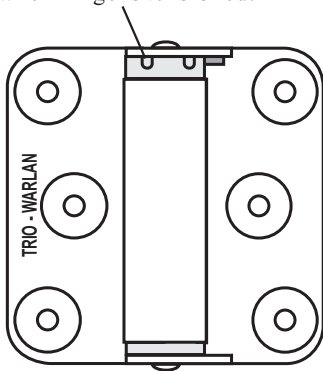

CAUTION

The Nylon “Fibre Glassed”
SPRING ADJUSTER being
precision made is long wearing
and silent in operation.

To avoid damage - WINDING
LEVER and KEEPER PIN must
be fully inserted.

DO NOT OVER TENSION

A WARLAN PRODUCT